


Product data sheet

Characteristics

33662

MX shunt release, ComPact NS630b to NS3200 fixed, MasterPact NT/NW, rated voltage 200/250 VDC, 200/250 VAC 50/60 Hz

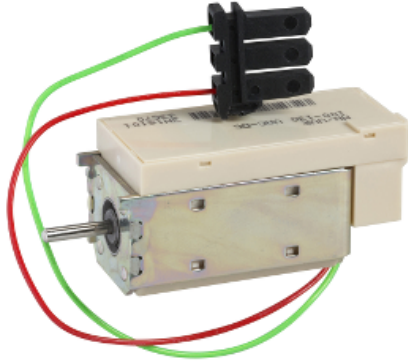

Main

Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT Masterpact NW Compact NS630b...1600 Compact NS1600b...3200
Voltage release type	Shunt trip release
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

Complementary

Threshold tripping voltage	0.7...1.1 x Un
Supply holding power	4.5 VA
Mounting mode	Fixed
Response time	50 ms (Compact NS630b...1600) 50 ms (Compact NS1600b...3200) 55 ms (Masterpact NT) 70 ms (Masterpact NW)
Accessory / separate part category	Spare parts for Masterpact NT Spare parts for Masterpact NW Spare parts for Compact NS1600b...3200 Spare parts for Compact NS630b...1600

Packing Units

Package 1 Weight	152 g
Package 2 Weight	1.556 kg
Package 3 Weight	19.303 kg

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information

Contractual warranty

Warranty	18 months
----------	-----------

Submitted by TECO Group